

# COR-MOBC2

## INFRARED MOBILE AUXILIARY CAMERA

CAMERA WITH ATTACHED CABLE



EZ-CONNECTOR PLUG


- 700-TV LINE RESOLUTION
- 4.0MM LENS
- AUTO-ELECTRONIC SHUTTER
- IR SENSITIVE 1/4" COLOR CCD

### SPECIFICATIONS

Video Sensor	Infrared Sensitive 1/4" color CCD
Lens	4.0mm w/optically clear glass lens cover
IR System	Automatic built-in radiant infrared array, 15' range
Resolution	700-TV lines
Minimum Illumination	0.2 LUX
AES	Auto-electronic shutter (1/10th to 1/100,000 sec.)
AWB	Auto-White Balance
AGC	Auto-Gain Control
Signal to Noise	>48dB
Housing	Acrylic
Bracket	Metal, tilt bracket
Video Format	NTSC or PAL
Video Signal	Composite color video, 1Vp-p 75-ohm impedance
Cables	Attached video and power cables (2')
Dimensions	1.5" LONG x 1.5" TALL (including bracket)
Weatherproof	IP66 - designed for outside, roof-top or side of vehicle placement
Power Requirement	Connects to vehicle 12VDC power supply, operational from 5.5-14.5VDC (120mA max.)

## FEATURES

- INCREASE SAFETY  
RECORD PASSENGER CONDUCT  
MONITOR CARGO SHIFT
- FULL COLOR IMAGING
- RUGGED DESIGN
- AUTOMATIC BUILT-IN RADIANT INFRARED ARRAY, 15' RANGE
- CONTINUOUS OPERATION OVER THE ROUGHEST ROADS
- TILT VISOR FEATURE TO REDUCE GLARE

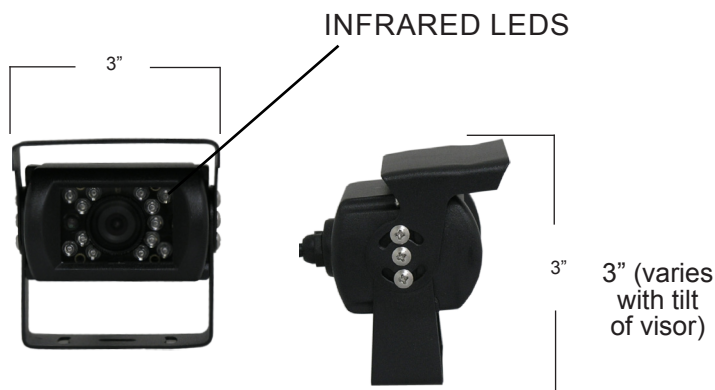

FRONT VIEW SIDE VIEW



TILT VISOR FEATURE

COR-MOBC2

